


TECHNICAL DATA | GALVANISED STEEL BACKING RING ANSI 150

Standards: ANSI
 Size Range: 20mm - 800mm
 Materials: Galvanised Steel
 Pressure Rating: ANSI 150

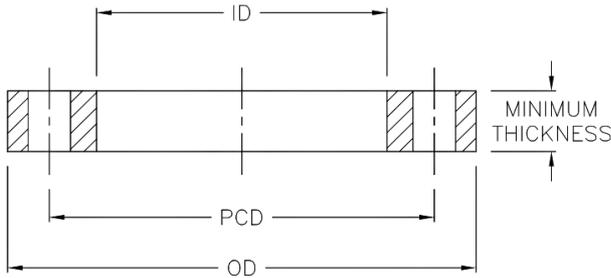

Nominal Pipe OD mm	OD mm	ID mm	Thickness mm	PCD mm	Bolt Hole No. x Dia	Bolt Size inch	Code
20	90	28	11.2	60.5	4 x 16	1/2"	BWBRA020
25	98	34	12.8	70	4 x 16	1/2"	BWBRA025
32	108	42	14.2	79.5	4 x 16	1/2"	BWBRA032
40	117	51	15.7	89	4 x 16	1/2"	BWBRA040
50	127	62	17.5	98.5	4 x 16	1/2"	BWBRA050
63	152	78	19	120.5	4 x 20	5/8"	BWBRA063
75	178	92	22.3	139.5	4 x 20	5/8"	BWBRA075
90	191	108	23.9	152	4 x 20	5/8"	BWBRA090
110	229	128	23.9	190.5	8 x 20	5/8"	BWBRA110
125	254	140	23.9	216	8 x 22	3/4"	BWBRA125
140	254	158	23.9	216	8 x 22	3/4"	BWBRA140
160	279	178	25.4	241	8 x 22	3/4"	BWBRA160
180	279	195	25.4	241	8 x 22	3/4"	BWBRA180
200	343	235	28.4	298.5	8 x 22	3/4"	BWBRA200
225	343	238	28.4	298.5	8 x 22	3/4"	BWBRA225

Note:

Installation should always be performed by a licensed operator. As the thicknesses of these flanges differ, it is the responsibility of the licensed installer to check the pressure rating of the flange to be installed, is suitable for the system which it is being used on. Correct installation procedures should always be followed.

The drawings, materials and specifications outlined are subject to change without notice due to the continuous improvements and development of our product range.

FUSION QLD PTY LTD


ABN: 42 987 067 369
 13 Vision Court, Noosaville, QLD, 4566
 42-44 South Link, Dandenong, VIC, 3175

CONTACT

T: +61 7 5474 3000 (Qld)
 T: +61 3 9037 4755 (Vic)
 E: sales@fusionqld.com.au
 W: fusionqld.com.au

TECHNICAL DATA | GALVANISED STEEL BACKING RING ANSI 150

Standards: ANSI
 Size Range: 20mm - 800mm
 Materials: Galvanised Steel
 Pressure Rating: ANSI 150

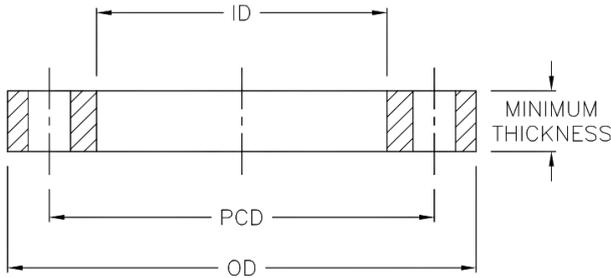

Nominal Pipe OD mm	OD mm	ID mm	Thickness mm	PCD mm	Bolt Hole No. x Dia	Bolt Size inch	Code
250	406	288	30.2	362	12 x 26	7/8"	BWBRA250
280	406	294	30.2	362	12 x 26	7/8"	BWBRA280
315	482	345	31.8	432	12 x 26	7/8"	BWBRA315
355	533	376	35	476	12 x 30	1"	BWBRA355
400	600	430	36.6	540	16 x 30	1"	BWBRA400
450	635	480	39.6	578	16 x 33	1.1/8"	BWBRA450
500	700	533	43	635	20 x 33	1.1/8"	BWBRA500
560	750	618	48	692	20 x 36	1.1/8"	BWBRA560
630	815	660	47.8	750	20 x 36	1.1/4"	BWBRA630
710	925	740	69.9	863.6	28 x 36	1.1/4"	BWBRA710
800	1060	835	81	977.9	28 x 41	1.3/4"	BWBRA800

Note:

Installation should always be performed by a licensed operator. As the thicknesses of these flanges differ, it is the responsibility of the licensed installer to check the pressure rating of the flange to be installed, is suitable for the system which it is being used on. Correct installation procedures should always be followed.

The drawings, materials and specifications outlined are subject to change without notice due to the continuous improvements and development of our product range.