


TECHNICAL DATA | REDUCING COUPLING

Standards: ASTM D2467

Size Range: 3/4" x 1/2" - 10" x 8"

Materials: uPVC





Size inch	D0 mm	D1 mm	D2 mm	d0 mm	d1 mm	d2 mm	d3 mm	t mm	T mm	L mm	Code
3/4" x 1/2"	36.9	26.87	26.57	30.5	21.54	21.23	17	23.22	26.4	58.6	STRC2015
1" x 1/2"	44.7	33.66	33.27	30.5	21.54	21.23	17	23.22	29.57	65.1	STRC2515
1" x 3/4"	44.7	33.66	33.27	36.9	26.87	26.57	22.5	26.40	29.57	66.3	STRC2520
1¼" x 1/2"	54	42.42	42.04	30.5	21.54	21.23	17	23.22	32.75	72.68	STRC3220
1¼" x 3/4"	54	42.42	42.04	36.9	26.87	26.57	22.5	26.40	32.75	73.8	STRC3225
1¼" x 1"	54	42.42	42.04	44.7	33.66	33.27	29	29.57	32.75	73.8	STRC4020
1½" x 3/4"	60.6	48.56	48.11	36.9	26.87	26.57	22.5	26.40	35.93	80	STRC4025
1½" x 1"	60.6	48.56	48.11	40.7	33.66	33.27	29	29.57	35.93	80	STRC4032
1½" x 1¼"	60.6	48.56	48.11	54	42.42	42.04	38	32.75	35.93	78.7	STRC5020
2" x 1"	73.1	60.63	60.17	44.7	33.66	33.27	92	29.57	39.1	88.2	STRC5025
2" x 1¼"	73.1	60.63	60.17	54	42.42	42.04	38	32.75	39.1	88.2	STRC5032
2" x 1½"	73.1	60.63	60.17	60.6	48.56	48.11	43	35.93	39.1	88.5	STRC5040

Note:

Installation should always be performed by a licensed operator. It is the responsibility of the installer to check that both the pipe(s) and fitting(s) that are installed are compatible, only compatible materials should be joined together. It is the responsibility of the licensed installer to check the PN ratings marked on the fitting(s) and ensure that the pipe is compatible. Correct installation procedures should always be followed.

The drawings, materials and specifications outlined are subject to change without notice due to the continuous improvements and development of our product range.

T: +61 3 9037 4755 (Vic) E: sales@fusionqld.com.au W: fusionqld.com.au

13 Vision Court, Noosaville, QLD, 4566 42-44 South Link, Dandenong, VIC, 3175

FUSION OLD PTY LTD

ABN: 42 987 067 369




TECHNICAL DATA | REDUCING COUPLING

Standards: ASTM D2467

Size Range: 3/4" x 1/2" - 10" x 8"

Materials: uPVC

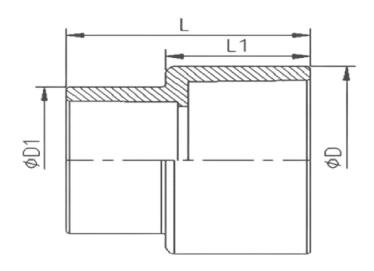



Size inch	L mm	L1 mm	D mm	D1 mm	Code	
2½" x 2"	83.5	50.5	87.5	70.8	STRC6550	
3" x 2"	89.5	58.5	103.3	70.8	STRC8050	
3" x 2½"	89	57.5	103.3	87.5	STRC8065	
4" x 2"	100	69	132.9	70.8	STRC10050	
4" x 3"	115	69	132.9	103.3	STRC10080	
6" x 4"	152	100	186.3	132.9	STRC150100	
8" x 6"	217	130	248.5	178.7	STRC200150	
10" x 8"	280.5	158.75	309.5	248.5	STRC250200	

Note:

Installation should always be performed by a licensed operator. It is the responsibility of the installer to check that both the pipe(s) and fitting(s) that are installed are compatible, only compatible materials should be joined together. It is the responsibility of the licensed installer to check the PN ratings marked on the fitting(s) and ensure that the pipe is compatible. Correct installation procedures should always be followed.

The drawings, materials and specifications outlined are subject to change without notice due to the continuous improvements and development of our product range.

E: sales@fusionqld.com.au W: fusionqld.com.au