

TECHNICAL DATA | uPVC BALL VALVE - DOUBLE UNION THREADED


Standards: Compatible with AS/NZS 1477 Pressure Pipe Applications

Size Range: 15mm - 100mm

Materials: Handle: ABS
Body: uPVC
Ball: uPVC
O-Ring: EDPM
Seal: PTEE

Pressure Rating: PN10

Fitting Details: BSP Threaded

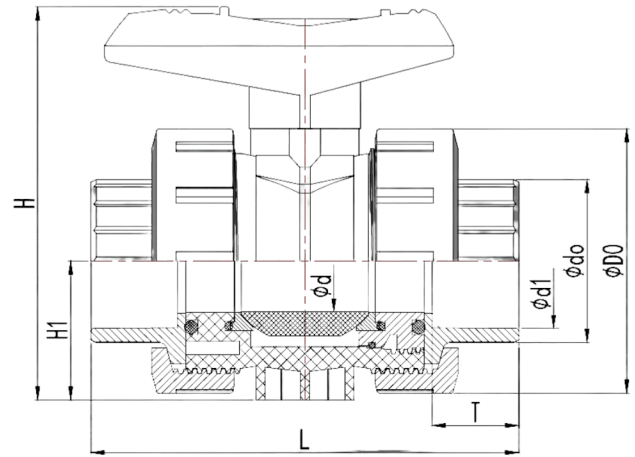

Size mm	d1 mm	d mm	do mm	D0 mm	T mm	L mm	H mm	H1 mm	Code
15	21.34	14	27.6	51.2	20.6	112.5	76.1	25.6	STBVDUT15
20	26.67	18.7	35.6	65.5	24.6	130.2	91.25	32.75	STBVDUT20
25	33.4	24	41.6	73.7	28	142.5	102.55	36.85	STBVDUT25
32	42.16	32	52	86.6	31	161	119.8	43.3	STBVDUT32
40	48.26	40	59.5	102	31.5	166.5	137	51	STBVDUT40
50	60.33	50	75	120	40	214	161.5	60	STBVDUT50
65	75.35	60	87.5	135	40	228	180	67.5	STBVDUT65
80	88.9	79	107.5	188	48	269	254.5	94	STBVDUT80
100	114.3	99	132	216	56	309	281.5	108	STBVDUT100

Note:

Installation should always be performed by a licensed operator. It is the responsibility of the installer to check that both the pipe(s) and fitting(s) that are installed are compatible, only compatible materials should be joined together. It is the responsibility of the licensed installer to check the PN and PSI ratings marked on the fitting(s) and ensure that the pipe is compatible. Correct installation procedures should always be followed.

The drawings, materials and specifications outlined are subject to change without notice due to the continuous improvements and development of our product range.

FUSION QLD PTY LTD


ABN: 42 987 067 369
13 Vision Court, Noosaville, QLD, 4566
42-44 South Link, Dandenong, VIC, 3175

CONTACT

T: +61 7 5474 3000 (Qld)
T: +61 3 9037 4755 (Vic)
E: sales@fusionqld.com.au
W: fusionqld.com.au

TECHNICAL DATA | uPVC BALL VALVE - DOUBLE UNION SOLVENT WELD

Standards:	Compatible with AS/NZS 1477 Pressure Pipe Applications
Size Range:	15mm - 100mm
Materials:	Handle: ABS Body: uPVC Ball: uPVC O-Ring: EDPM Seal: PTEE
Pressure Rating:	PN10
Fitting Details:	Solvent Weld

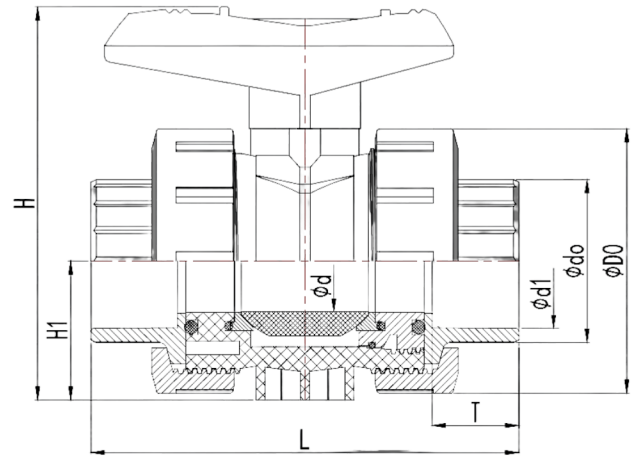

Size mm	d1 mm	d mm	do mm	D0 mm	T mm	L mm	H mm	H1 mm	Code
15	21.34	14	27.6	51.2	20.6	112.5	76.1	25.6	STBVDUS20
20	26.67	18.7	35.6	65.5	24.6	130.2	91.25	32.75	STBVDUS20
25	33.4	24	41.6	73.7	28	142.5	102.55	36.85	STBVDUS25
32	42.16	32	52	86.6	31	161	119.8	43.3	STBVDUS32
40	48.26	40	59.5	102	31.5	166.5	137	51	STBVDUS40
50	60.33	50	75	120	40	214	161.5	60	STBVDUS50
65	75.35	60	87.5	135	40	228	180	67.5	STBVDUS65
80	88.9	79	107.5	188	48	269	254.5	94	STBVDUS80
100	114.3	99	132	216	56	309	281.5	108	STBVDUS100

Note:

Installation should always be performed by a licensed operator. It is the responsibility of the installer to check that both the pipe(s) and fitting(s) that are installed are compatible, only compatible materials should be joined together. It is the responsibility of the licensed installer to check the PN and PSI ratings marked on the fitting(s) and ensure that the pipe is compatible. Correct installation procedures should always be followed.

The drawings, materials and specifications outlined are subject to change without notice due to the continuous improvements and development of our product range.

FUSION QLD PTY LTD

ABN: 42 987 067 369
13 Vision Court, Noosaville, QLD, 4566
42-44 South Link, Dandenong, VIC, 3175

CONTACT

T: +61 7 5474 3000 (Qld)
T: +61 3 9037 4755 (Vic)
E: sales@fusionqld.com.au
W: fusionqld.com.au