


## TECHNICAL DATA | uPVC INDUSTRIAL SLIDING GATE VALVE

### Materials and General Specifications

	225 mm (250 ID)	300 mm (315 ID)
<b>Colour:</b>	Grey	Grey
<b>Body:</b>	uPVC	uPVC
<b>Shaft:</b>	SS 304	SS 304
<b>Handle:</b>	SS 304	SS 304
<b>Paddle:</b>	SS 304	SS 304
<b>Seal:</b>	EPDM	EPDM
<b>Max PSI: Open/Closed</b>	6/8	6/8
<b>Mid Flow Max: Closing</b>	2.5 psi	2.5 psi

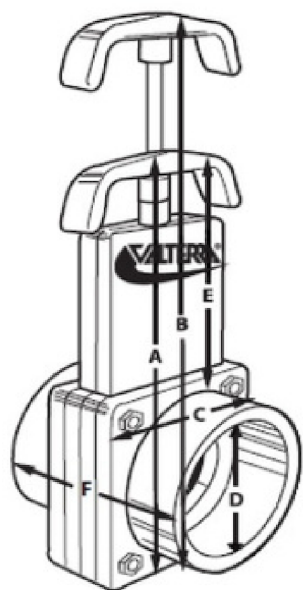

### Valve Dimensions

Size (mm)	A	B	C	D	E	F	Code
225 (250 ID)	889	1232	469.30	251	514.4	341.3	TGVS225
300 (315 ID)	889	1232	469.30	316	485.8	409	TGVS300

### Solvent

Valve Fitting	Pipe	Size (mm)	Cement
uPVC	uPVC	225 -300	<ul style="list-style-type: none"> <li>Clear Type N Solvent</li> <li>Green Type P Solvent</li> </ul>

**Note:**

Installation should always be performed by a licensed operator. It is the responsibility of the installer to check that both the pipe(s) and fitting(s) that are installed are compatible, only compatible materials should be joined together. It is the responsibility of the licensed installer to check the PN ratings marked on the fitting(s) and ensure that the pipe is compatible. Correct installation procedures should always be followed.

The drawings, materials and specifications outlined are subject to change without notice due to the continuous improvements and development of our product range.

### Max Working Temperature

Material	Suggested Maximum Working Temperature
ABS	96° C
uPVC	75° C
PC	137° C

**FUSION QLD PTY LTD**

ABN: 42 987 067 369  
13 Vision Court, Noosaville, QLD, 4566  
42-44 South Link, Dandenong, VIC, 3175

**CONTACT**

T: +61 7 5474 3000 (Qld)  
T: +61 3 9037 4755 (Vic)  
E: sales@fusionqld.com.au  
W: fusionqld.com.au