

## TECHNICAL DATA | VALVE SPACER SDR11


Standards: AS/NZS 4129 | SDR11

Size Range: 110mm - 630mm


Materials: Polyethelyne (PE) 100

Pressure Rating: PN16, Water | 10 BAR, Gas

Fitting Details: Injected

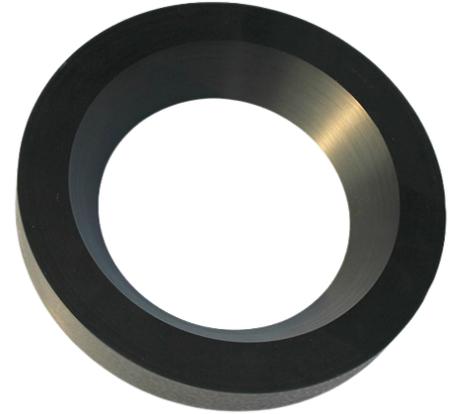

size mm	A mm	B mm	C mm	Deg °	Code
110	90	158	14	20	BWVS11110
125	102	190	25	25	BWVS11125
140	114.6	188	25	20	BWVS11140
160	130.8	212	25	25	BWVS11160
200	163.6	268	40	30	BWVS11200
225	184	268	25	25	BWVS11225
250	203	334	50	30	BWVS11250
280	228	334	30	30	BWVS11280
315	257.8	384	60	30	BWVS11315
355	290.6	430	60	30	BWVS11355
400	327.4	482	80	30	BWVS11400
450	368.2	545	100	25	BWVS11450
500	409.2	585	100	25	BWVS11500
630	513	708	100	20	BWVS11630

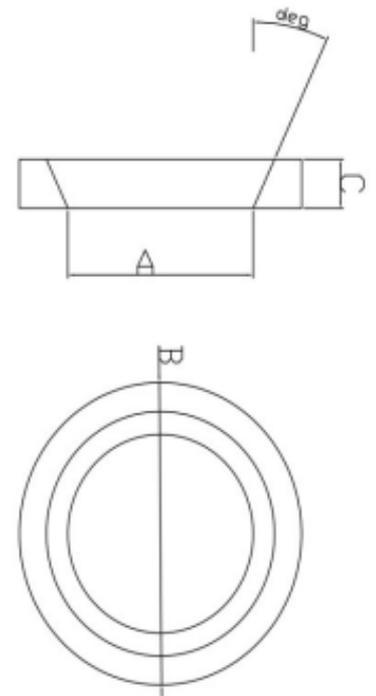

**Note:**

Installation should always be performed by a licensed operator. It is the responsibility of the installer to check that both the pipe(s) and fitting(s) that are installed are compatible, only compatible materials should be joined together. It is the responsibility of the licensed installer to check the PN and SDR ratings marked on the fitting(s) and ensure that the pipe is compatible. Correct installation procedures should always be followed.

The drawings, materials and specifications outlined are subject to change without notice due to the continuous improvements and development of our product range.

**FUSION QLD PTY LTD**

ABN: 42 987 067 369  
13 Vision Court, Noosaville, QLD, 4566  
42-44 South Link, Dandenong, VIC, 3175

**CONTACT**

T: +61 7 5474 3000 (Qld)  
T: +61 3 9037 4755 (Vic)  
E: sales@fusionqld.com.au  
W: fusionqld.com.au